



# SANICUBIC® 1

SEWAGE LIFTING UNIT

# SANICUBIC® 1 WP

SEWAGE LIFTING UNIT

12






Grinder  
ProX K2



Smart control unit for  
SANICUBIC® 1 WP\*

**SEWAGE**  
WC, bathroom, kitchen and laundry

13 m  
↑

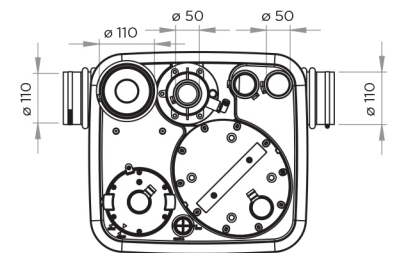


\*contact us for availability

# SANICUBIC® 1

SEWAGE LIFTING UNIT

# SANICUBIC® 1 WP

SEWAGE LIFTING UNIT

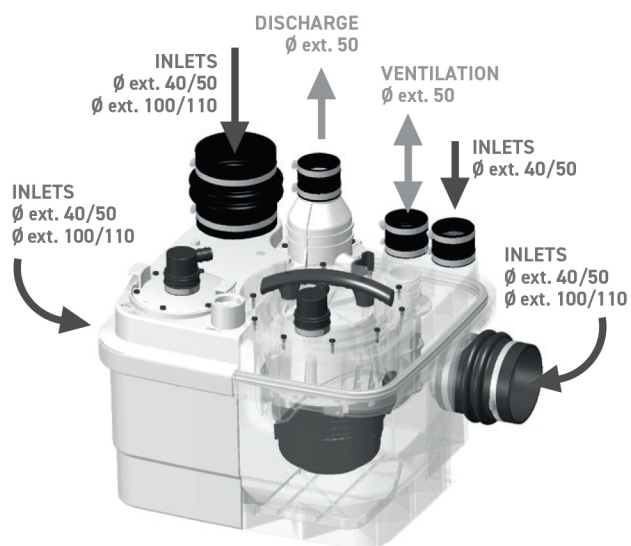

## BENEFITS

- High-performance operation, SFA Grinder system
- Safe operation, audible and visual alarm unit
- Easier installation and maintenance, direct and safe access to the motor and level sensors

## APPLICATIONS

- Multiple WC
- Bathroom
- Kitchen and laundry

## ISOLATION VALVE

DN50: EAN 3308815061030  
DN100: EAN 3308815061023



## CARBON AIR FILTER


EAN 3308815076867



## FEATURES

- Polypropylene container
- Max. temperature of incoming waste water 70°C intermittently (max. 5 min.)
- Discharge pipe diameter DN 40 (ext. 50 mm)
- ON/OFF level 140/80 mm
- Alarm level 210 mm

## PUMP GRAPH

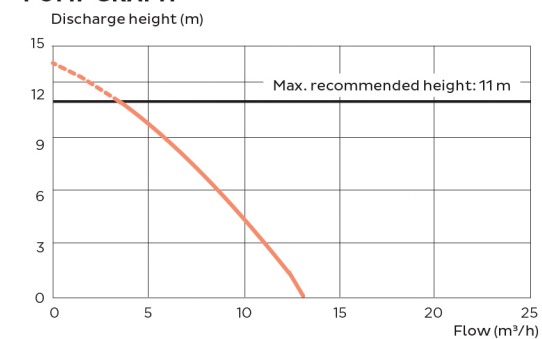

REFERENCE	EAN	FACTORY CODE	SYSTEM	TANK (L)	SWITCHING VOLUME (L)	U (V)	P (W)	FREQUENCY (HZ)	I MAX (A)	TR/MN	POWER CLASS	Q MAX (M³/H)	H MAX (M)	WEIGHT (KG)	REMOTE CONTROL	POWER CLASS CONTROL	ALARM
<b>SANICUBIC 1 GR S</b>	<b>3 308 815 074 429</b>	<b>CUBIC1NM</b>	<b>Grinder</b>	<b>32</b>	<b>10</b>	<b>230</b>	<b>1,500</b>	<b>50/60</b>	<b>6</b>	<b>2,800</b>	<b>IP 67</b>	<b>13</b>	<b>13</b>	<b>21</b>	-	-	<b>External, wired</b>
<b>SANICUBIC 1 GR S WP</b>	<b>3 308 815 074 436</b>	<b>CUBIC1IP68NM</b>												<b>Classic</b>	<b>IP X4</b>		
<b>SANICUBIC 1 GR S WP SMART</b>	<b>3 308 815 075 440</b>	<b>CUBIC1IP68NMSMART</b>												<b>Smart</b>			